



KODAK

Portable SSD X200 Specification





KODAK PSSD X200 is a portable solid-state drive that is a next-generation high-speed storage product, offering a capacity range from 120GB to 2TB. The maximum read and write speeds can reach high performance of up to 500 MB/s¹ and 450 MB/s.

KODAK PSSD X200 customized for users who need to quickly move large files, providing powerful performance for high-speed transfer of photos and 4K, 8K video files.

Easy and efficient file transfer, durable casing, easy to carry around, and the design of three-dimensional spiral circular pattern and yellow silicone storage strap bring you a high-quality product experience.

1. Product specifications


- | | |
|--|---|
| <ul style="list-style-type: none">● Capacity<ul style="list-style-type: none">■ 128GB, 256GB, 512GB, 1TB● Size<ul style="list-style-type: none">■ 91x45x10mm● USB<ul style="list-style-type: none">■ USB3.2 Gen1 Type-C■ Compliance with USB 2.0■ Compliance with USB 1.1● Operating System compatibility<ul style="list-style-type: none">■ Support Windows XP and later version■ Support MAC OS 10.8 and later version■ Support Linux kernel 2.4.10 and later version | <ul style="list-style-type: none">● Temperature Range<ul style="list-style-type: none">■ Operation: 0°C ~ 45°C■ Storage: -20°C ~ 75°C● Certification<ul style="list-style-type: none">■ CE■ FCC■ RoHS |
|--|---|



2. Product Performance

PN Number	Capacity	Crystal Disk Mark	
		Read (MB/s)	Write (MB/s)
EKSSD128GX200K	128GB	450	400
EKSSD256GX200K	256GB	450	400
EKSSD512GX200K	512GB	500	450
EKSSD1TX200K	1TB	500	450

3. Product design rendering

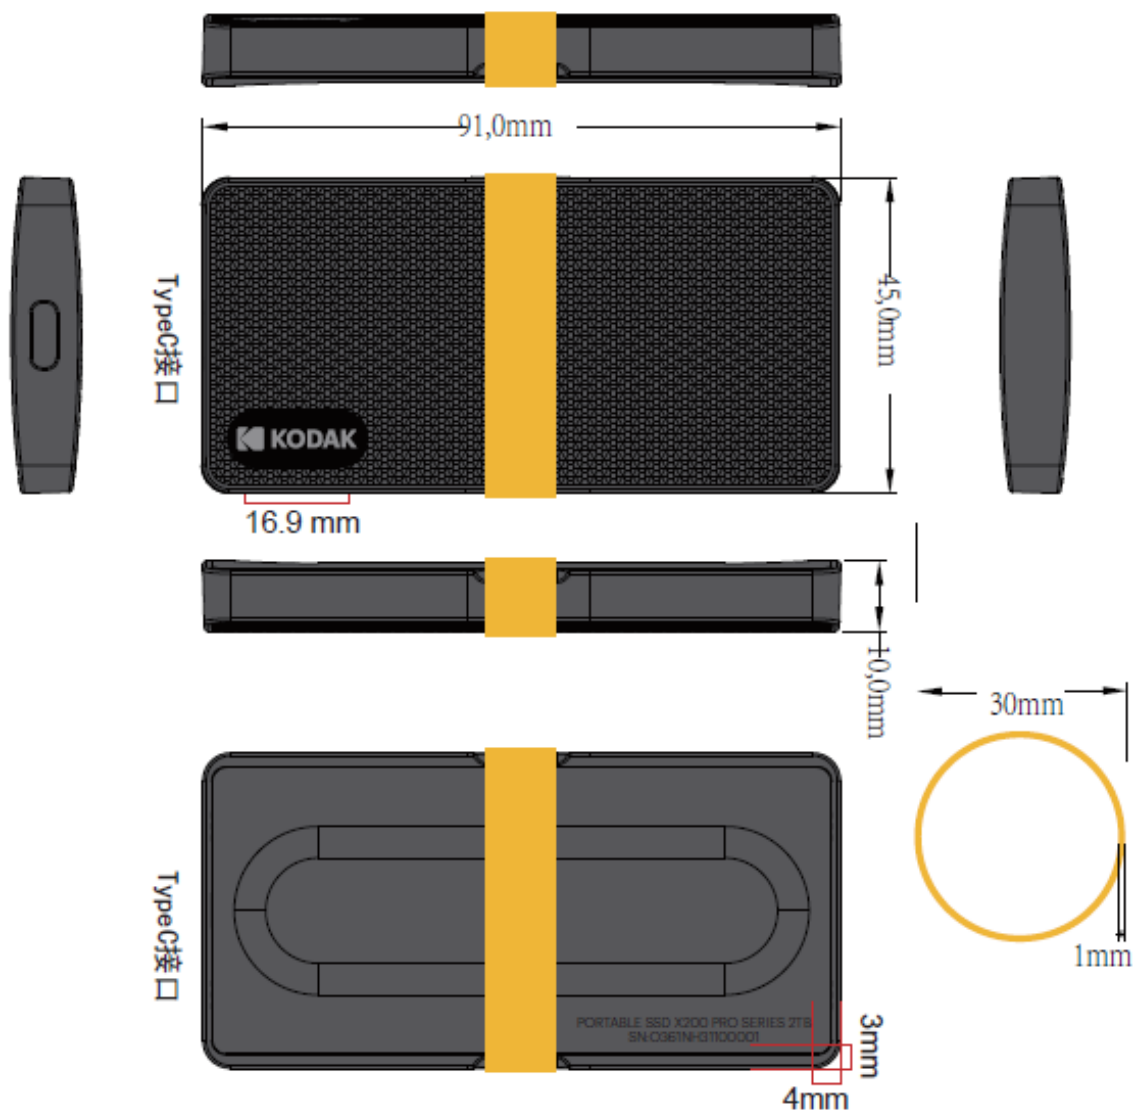



4. Product packaging



EN SPECIFICATIONS

Port Type: Type-C 3.1

Size: 90.5 x 45 x 10mm

Operating Temperature: 0°C - 60°C

Performances may vary based on computer configuration, product capacity & testing software.

Please proceed to a double backup of your important data on another device.

CN 参数

接口类型: Type-C 3.1

尺寸: 90.5 x 45 x 10mm

工作温度: 0°C - 60°C

注意: 实际速度因电脑配置、产品容量及测试软件不同而异; 重要文件请在其它设备上做好双重备份。

繁体 参数

接口類型: Type-C 3.1

尺寸: 90.5 x 45 x 10mm

工作溫度: 0°C - 60°C

注意: 實際速度因電腦配置、產品容量及測試軟件不同而異; 重要文件請在其它設備上做好雙重備份。

Dexxon Groupe, 2022

© 2022 Dexxon

Dexxon Groupe

79, avenue Louis Roche, 92230 Gennevilliers, France.

CHINA:

Hong Kong BKS Technology Co., Limited

Flat/Rm 1205, Apec Plaza, N°49 Hoi Yuen Road,

Kwun Tong KL, Hong Kong.

置富科技(深圳)股份有限公司

深圳市龙岗区平湖街道山厦社区中环大道中科谷产业园E栋

www.kodakflash.com.cn

The Kodak trademark, logo and trade dress are used under license from Kodak.

